

THRASHER

R/T RTD01

Ironhead Thrasher RT RTD01 is ready to tackle the pavement and further. Striking a perfect balance between off-road durability and on-road performance, making it a versatile choice for those who enjoy a combination of both worlds. Carefully designed with the same level of care and quality put into drivability is very evident in the appearance of this RT tire. Enhancing your vehicle's overall appearance, the sidewall biters alone will definitely be a conversation starter when your vehicle is parked. The Thrasher RT tire is specifically engineered to provide excellent traction and handling in various terrains, making it ideal for those who enjoy exploring different types of landscapes. Available in 36 sizes from 17"-22", all being 3PMS certified.



45,000 Mile Limited Treadwear Warranty
 For full warranty details, please visit [Warranty Mileage Warranty](#) does not apply to LT tires.

YEAR ROUND PERFORMER


3 Peak Mountain Snowflake Certified (3PMS) for severe snow performance. LT sizes are also pinned for studs.

FULL TREAD DEPTHS

Deep tread depth, 16/32-18/32. Aggressive sidewall biters provide desired aesthetics and functionally offer off-road durability when the terrain demands it.

OPTIMIZED TREAD DESIGN

Optimized tread contact patch ensures vehicle stability. While strategically angled tread blocks promote ride comfort with reduced road noise. Staggered scalloped shoulder lugs with stone ejectors maximize traction as well as aid in the removal of debris in the voids.

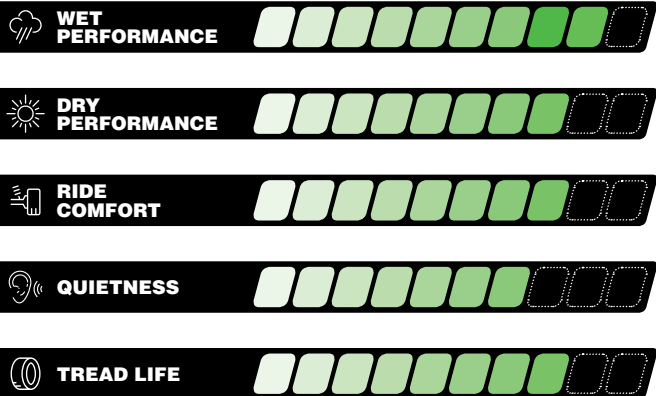

THRASHER

R/T RTD01



SIZE	PR	LI/SR	T.D.	O.D.	S.W.	R.W.	UTQG	MAX LOAD 1X	MAX LOAD 2X
			32/in.	in.	in.	in.		LBS@PSI	LBS@PSI
265/70R17		115T	16	31.7	10.7	8.0	600 A B	2679@44	
255/70R18	XL	116T	16	32.1	10.2	7.5	600 A B	2756@50	
265/60R18	XL	114S	16	30.5	10.7	8.0	600 A B	2601@50	
265/65R18	XL	116T	16	31.5	10.7	8.0	600 A B	2756@50	
265/70R18		116S	16	32.6	10.7	8.0	600 A B	2756@44	
275/65R18	XL	116T	16	32.1	11.0	8.0	600 A B	2756@50	
265/50R20	XL	111T	16	30.5	10.9	8.5	600 A B	2403@50	
275/55R20	XL	117T	16	31.9	11.2	8.5	600 A B	2833@50	
275/60R20	XL	116T	16	33.0	11.0	8.0	600 A B	2756@50	
285/45R22	XL	114Q	16	32.1	11.2	9.5	600 A B	2601@50	
LT245/70R17	10	119/116Q	18	30.6	9.8	7.0		3000@80	2755@80
LT245/75R17	10	121/118Q	18	31.7	9.8	7.0		3195@80	2910@80
LT265/70R17	10	123/120Q	18	31.7	10.7	8.0		3415@80	3085@80
LT285/70R17	10	126/123Q	18	32.8	11.5	8.5		3750@80	3415@80
LT265/65R18	10	122/119Q	18	31.5	10.7	8.0		3305@80	3000@80
LT265/70R18	10	124/121Q	18	32.6	10.7	8.0		3525@80	3195@80
LT275/65R18	10	123/120Q	18	32.1	11.0	8.0		3415@80	3085@80
LT275/70R18	10	125/122Q	18	33.2	11.0	8.0		3640@80	3305@80
LT275/55R20	10	120/117Q	18	31.9	11.2	8.5		3085@80	2835@80
LT275/60R20	10	123/120Q	18	33.0	11.0	8.0		3415@80	3085@80
LT275/65R20	10	126/123Q	18	34.1	11.0	8.0		3750@80	3415@80
LT305/55R20	12	125/122Q	18	33.2	12.4	9.5		3640@80	3305@80
33X12.50R17LT	10	120Q	18	32.8	12.5	10.0		3085@65	
35X12.50R17LT	10	125Q	18	34.8	12.5	10.0		3640@80	
37X12.50R17LT	8	124Q	18	36.5	12.5	10.0		3525@80	
33x12.50R18LT	12	122Q	18	32.8	12.5	10.0		3305@80	
35x12.50R18LT	12	128Q	18	34.8	12.5	10.0		3970@80	
37x12.50R18LT	10	128Q	18	36.5	12.5	10.0		3968@76	
33x12.50R20LT	12	119Q	18	32.8	12.5	10.0		3000@80	
35x12.50R20LT	12	125Q	18	34.8	12.5	10.0		3640@80	
35x13.50R20LT	12	126Q	18	34.5	13.6	11.0		3750@80	
37x12.50R20LT	10	126Q	18	36.5	12.5	10.0		3750@80	
33x12.50R22LT	12	114Q	18	32.5	12.5	10.0		2600@80	
35x12.50R22LT	12	121Q	18	34.5	12.5	10.0		3195@80	
37x12.50R22LT	12	127Q	18	36.5	12.5	10.0		3860@80	
37x13.50R22LT	12	128Q	18	36.5	13.6	11.0		3970@80	